



DMK 457

Pressure Transmitter For Shipbuilding And Offshore

Ceramic Sensor

**accuracy according to IEC 60770:
0.5 % FSO**

Shipbuilding and Offshore

DMK 457

Nominal pressure

from 0 ... 400 mbar
up to 0 ... 600 bar

Output signals

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ shipping approvals
GL (Germanischer Lloyd),
DNV (Det Norske Veritas) and
CCS (China Classification Society)
- ▶ pressure port CuNiFe
(sea water resistant)
- ▶ oxygen application

Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for
gases and dusts

The pressure transmitter DMK 457 with ceramic sensor has been designed for hard conditions especially in shipbuilding and offshore applications as alternative to our pressure transmitter DMP 457 with piezoresistive stainless steel sensor.

In order to meet the special requirements for shipbuilding and offshore applications extensive tests had to be passed to get the Germanischer Lloyd (GL), Det Norske Veritas (DNV) and China Classification Society (CCS) approvals.

Preferred areas of use are



Drives
Compressors
Boiler
Pneumatic Control Systems
Oxygen Applications



Fuel and Oil



Water and Sea Water




Input pressure range																		
Nominal pressure gauge [bar]	-1 ... 0	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	600
Nominal pressure abs. [bar]	-	-	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	600
Level gauge / abs. [mH ₂ O]	-	-	6	10	16	25	40	60	100	160	250	400	600	-	-	-	-	-
Overpressure [bar]	4	1	2	2	4	4	10	10	20	40	40	100	100	200	400	400	600	800
Burst pressure ≥ [bar]	7	2	4	4	5	5	12	12	25	50	50	120	120	250	500	500	650	880
Vacuum resistance	P _N ≥ 1 bar: unlimited vacuum resistance P _N < 1 bar: on request																	
Output signal / Supply																		
Standard	2-wire: 4 ... 20 mA / V _S = 8 ... 32 V _{DC}																	
Option IS-protection	2-wire: 4 ... 20 mA / V _S = 10 ... 28 V _{DC}																	
Performance																		
Accuracy ¹	IEC 60770: ≤ ± 0.5 % FSO																	
Permissible load	R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω																	
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ																	
Response time	< 10 msec																	
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)																		
Thermal effects (Offset and Span) / Permissible temperatures																		
Thermal error	≤ ± 0.2 % FSO / 10 K in compensated range -25 ... 85 °C																	
Permissible temperatures	medium: -40 ... 125 °C electronics / environment: -40 ... 85 °C storage: -40 ... 100 °C																	
Electrical protection																		
Short-circuit protection	permanent																	
Reverse polarity protection	no damage, but also no function																	
Electromagnetic compatibility	emission and immunity according to - EN 61326 - Germanischer Lloyd (GL) - Det Norske Veritas (DNV)																	
Mechanical stability																		
Vibration	4 g (according to GL: curve 2 / according to DNV: Class B / basis: IEC 60068-2-6)																	
Materials																		
Pressure port	Standard: stainless steel 1.4404 (316L) option ² : CuNi10Fe1Mn (sea water resistant) - for P _N ≤ 400 bar with mech. connection G1/2" DIN 3852, G1/2" EN 837, G1/2" open port, G1/4" DIN 3852, G1/4" EN 837 in combination with housing in CuNi10Fe1Mn																	
Housing	standard: stainless steel 1.4404 (316L) option ² : CuNi10Fe1Mn (sea water resistant) - in combination with pressure port in CuNi10Fe1Mn option field housing: stainless steel 1.4404 (316L); with cable gland																	
Cable sheath	for cable outlet		for submersible version						permissible temperatures									
	PVC - cable PUR - cable		PVC - probe cable PUR - probe cable FEP - probe cable TPE - probe cable						-5 ... 70 °C -25 ... 70 °C -25 ... 70 °C -25 ... 125 °C									
Seals (media wetted)	standard: FKM option: NBR, FFKM (only for P _N ≤ 100 bar) others on request																	
Diaphragm	ceramic Al ₂ O ₃ 96 %																	
Media wetted parts	pressure port, seals, diaphragm																	
² IS-version on request																		
IS-protection (only for 4 ... 20 mA / 2-wire)																		
Approval DX19-DMK 457	IBExU10ATEX1068X Zone 0: II 1 G Ex ia IIB T4 Ga Zone 20: II 1 D Ex iaD 20 T85 °C																	
Safety technical maximum values	U _i = 28 V, I _i = 93 mA, P _i = 660 mW, C _i = 105 nF, L _i = 5 μH																	
Permissible media temperature	in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -20 ... 70 °C																	
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μH/m																	

Miscellaneous	
Option oxygen application	for $P_N \leq 25$ bar: O-ring in special material with oxygen approval (FKM)
Current consumption	max. 25 mA
Weight	approx. 140 g (with ISO 4400)
Installation position	any
Operational life	$> 100 \times 10^6$ pressure cycles
CE-conformity	EMC Directive: 2004/108/EC Pressure Equipment Directive: 97/23/EC (module A) ³
ATEX-directive	94/9/EC

³ This directive is only valid for devices with maximum permissible overpressure > 200 bar

Wiring diagram


2-wire-system (current)

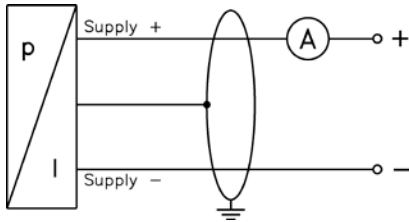

Pin configuration

Electrical connection	ISO 4400	Field housing	Cable colours (DIN 47100)
Supply +	1	IN +	white
Supply -	2	IN -	brown
Shield	ground pin	\perp	yellow / green

Electrical connections ⁴ (dimensions in mm)

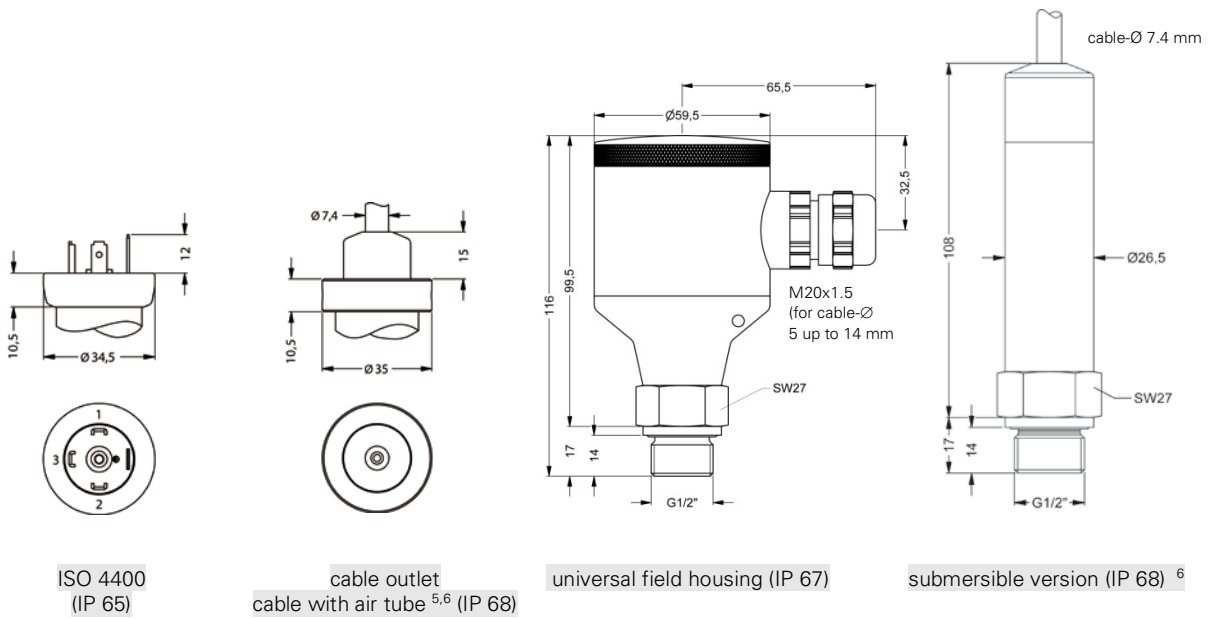


⁴ Generally shielded cable has to be used! Cable versions are delivered with shielded cable. For ISO 4400 the use of shielded cable is compulsory.

⁵ tested at 4 bar or 40 mH₂O for 24 hours

⁶ different cable types and lengths available, permissible temperature depends on kind of cable, see cable connection


Mechanical connection (dimensions in mm)

Standard

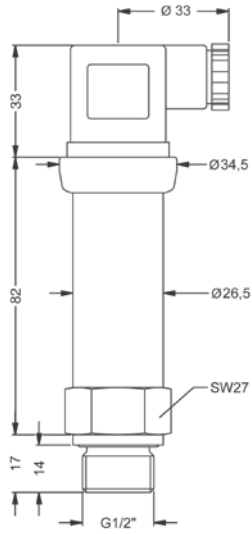


G 1/2" DIN 3852


Option




G 1/2" EN 837




G 1/4" DIN 3852




G 1/4" EN 837



1/2" NPT



1/4" NPT



G 1/2" open port DIN 3852
(up to 40 bar)

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

Ordering code DMK 457

DMK 457

□□□ - □□□□ - □ - □ - □□□ - □□□□ - □ - □ - □ - □□□□

Pressure									
	in bar, gauge	5	9	0					
	in bar, absolute	5	9	1					
	in mH ₂ O, gauge	5	9	2					
	in mH ₂ O, absolute	5	9	3					
Input									
	[mH ₂ O]	[bar]							
	4	0.4	4	0	0	0			
	6	0.6	6	0	0	0			
	10	1.0	1	0	0	1			
	16	1.6	1	6	0	1			
	25	2.5	2	5	0	1			
	40	4.0	4	0	0	1			
	60	6.0	6	0	0	1			
	100	10	1	0	0	2			
	160	16	1	6	0	2			
	250	25	2	5	0	2			
	400	40	4	0	0	2			
	600	60	6	0	0	2			
	100		1	0	0	3			
	160		1	6	0	3			
	250		2	5	0	3			
	400		4	0	0	3			
	600		6	0	0	3			
	-1 ... 0		X	1	0	2			
	customer		9	9	9	9			consult
Output									
	4 ... 20 mA / 2-wire					1			
	Intrinsic safety 4 ... 20 mA / 2-wire					E			
	customer					9			consult
Accuracy									
	0.5 %					5			
	customer					9			consult
Electrical connection									
	Male and female plug ISO 4400 (for cable Ø 4...6 mm)					G	1	0	
	Male and female plug ISO 4400 GL (for cable Ø 10...14 mm) ^{1,2}					G	0	0	
	Male and female plug ISO 4400 GL (for cable Ø 4.5...11 mm) ^{1,2}					G	0	1	
	Cable outlet ^{1,3}					T	R	0	
	Field housing stainless steel					8	8	0	
	Submersible version (1.4404 / 316L)					T	T	0	
	Submersible version (CuNiFe)					T	S	0	
	customer					9	9	9	consult
Mechanical connection									
	G1/2" DIN 3852					1	0	0	
	G1/2" EN 837					2	0	0	
	G1/4" DIN 3852					3	0	0	
	G1/4" EN 837					4	0	0	
	G1/2" DIN 3852 open pressure port					H	0	0	
	1/2" NPT					N	0	0	
	1/4" NPT					N	4	0	
	customer					9	9	9	consult
Seals									
	FKM					1			
	FFKM ⁴					7			
	option					5			
	customer					9			consult
Pressure port									
	Stainless steel 1.4404 (316L)					1			
	Copper-Nickel-alloy (CuNi10Fe1Mn) ⁵					K			
	customer					9			consult
Diaphragm									
	Ceramics Al ₂ O ₃ 96%					2			
	customer					9			consult
Special version									
	standard						0	0	0
	oxygen application ⁶						0	0	7
	customer						9	9	9

¹ Shielded cable has to be used! Cable versions are delivered with shielded cable.
² female plug is GL-approved
³ different cable types and lengths deliverable, permissible temperature depends on kind of cable
⁴ only for P_N ≤ 100 bar possible
⁵ optionally for nominal pressure ranges up to 400 bar and mechanical connections G1/2" DIN 3852, G1/2" EN 837, G1/2" open port, G1/4" DIN 3852, G1/4" EN837 in combination with housing in CuNi10Fe1Mn
⁶ oxygen application with FKM seal possible up to 25 bar

This price list contains product specification; properties are not guaranteed. Detailed information about options are defined in the datasheet. Subject to change without notice.

